

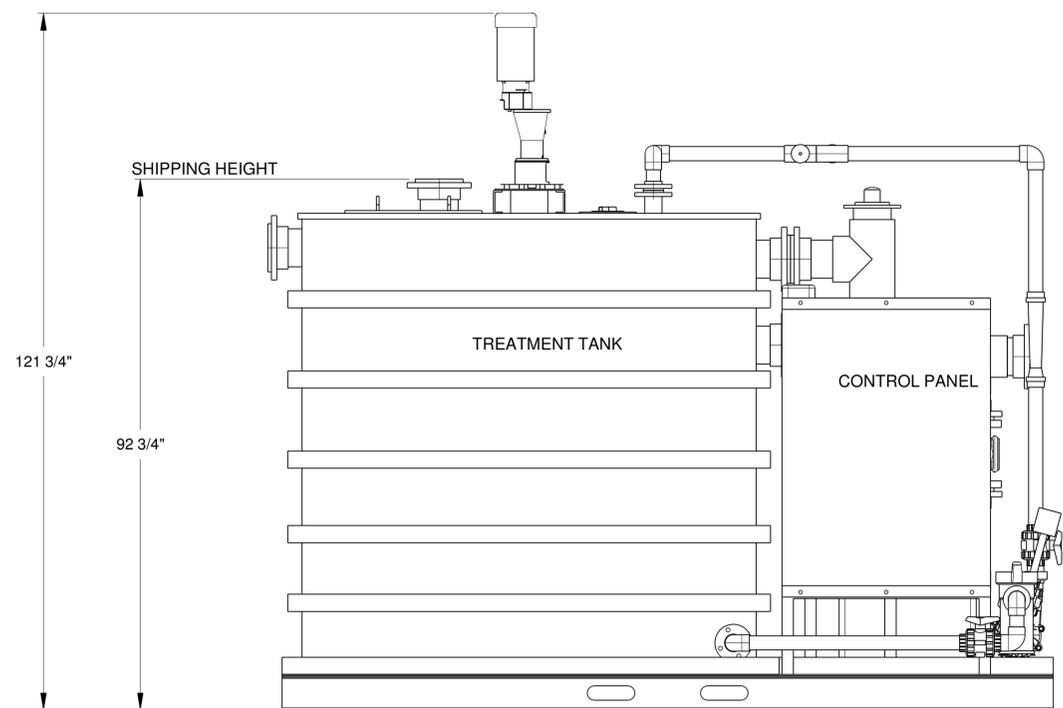


NOTES:

1) SYSTEM IS DESIGNED TO TREAT WASTE AT UP TO 75 GPM.

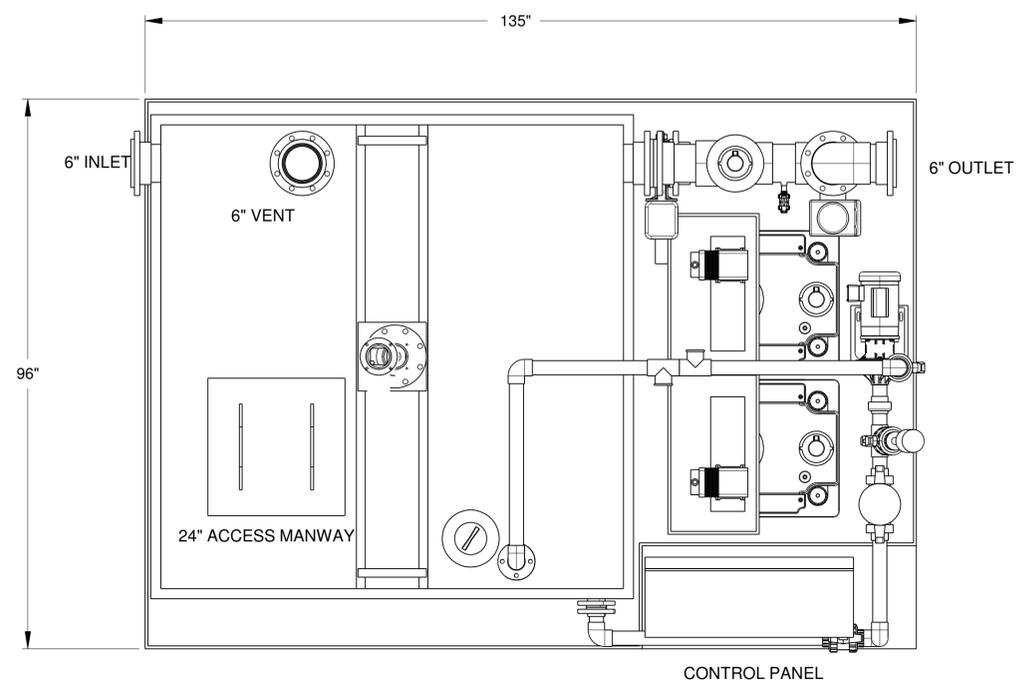

70 GALLON DOUBLE CONTAINED REAGENT TANKS

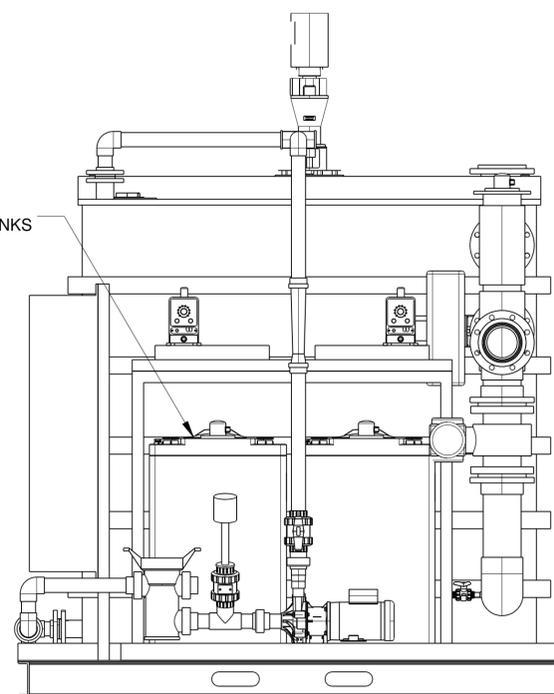

#	DATE	DESCRIPTION	BY
A			SMS

ESTIMATED WEIGHT		SERVICE REQ.	
SHIPPING		PRIM. ELEC.	
OPERATING	#	SEC. ELEC.	
		PNEUMATIC	
		WATER	

BURT | PROCESS EQUIPMENT
 FLUID HANDLING EQUIPMENT SINCE 1970
 100 OVERLOOK DR. HAMDEN, CT 06514 (203) 287-1985
 WWW.BURTPROCESS.COM

CUSTOMER:	ENG. BY:
	SMS
	DWN. BY:
	SMS
SCALE: 1/16	BPE JOB NO.:
	APP. BY:

TITLE:
ACS-75 pH TREATMENT SYSTEM ASSEMBLY

DWG NO.:	REV.:
1 OF 1	A

THIS DRAWING CONTAINS PROPRIETARY INFORMATION WHICH IS INTENDED FOR USE BY ONLY THOSE PARTIES LISTED AND MAY NOT BE MODIFIED, REPRODUCED, OR RETRANSMITTED WITHOUT THE CONSENT OF BURT PROCESS EQUIPMENT.